

## 3M™ Aura™ Particulate Respirators 9300+ Series

### Description



The 3M™ Aura™ Particulate Respirators 9300+ Series meet the requirements of European Standard EN 149:2001+ A1:2009, filtering facepiece respirators for use against particles. They provide effective respiratory protection for use in industries where workers will be exposed to solid (dust) particles and/or non-volatile liquid particles.

### Applications

These respirators are suitable for use in concentrations of solid (dust) particles and/or non-volatile liquid particles up to the following limits.

### Product Range

Model	EN 149+A1	Exhalation Valve	Nominal Protection Factor (NPF)*	Typical Weight (g)
3M™ Aura™ Particulate respirator 9310+	FFP1 NR D	Unvalved	4	10
3M™ Aura™ Particulate respirator 9312+	FFP1 NR D	Valved	4	15
3M™ Aura™ Particulate respirator 9320+ 3M™ Aura™ Particulate respirator 9320D+	FFP2 NR D	Unvalved	12	10
3M™ Aura™ Particulate respirator 9322+	FFP2 NR D	Valved	12	15
3M™ Aura™ Particulate respirator 9330	FFP3 NR D	Unvalved	50	10
9332+3M™ Aura™ Particulate respirator 9332+	FFP3 NR D	Valved	50	15

\*Many countries apply Assigned Protection Factors (APFs) which reduce the maximum concentrations of particles in which these products can be used. See national regulations and EN 529:2005.

Respiratory protection is only effective if it is correctly selected, fitted and worn throughout the time when the wearer is exposed to hazards.

Please contact 3M for information about which products are available outside the EU.

## Components and Materials

The following materials are used in the production of the 3M™ Aura™ Particulate Respirators 9300+Series: This product does not contain components made from natural rubber latex.

Straps	Polyisoprene
Staples	Steel
Nose Foam	Polyurethane
Nose clip	Aluminium
Filter	Polypropylene
Valve housing	Polypropylene
Exhalation Valve	Polyisoprene

### NOTE

3M™ Aura™ Particulate Respirators 9312+, 9322+ and 9332+ contain at least 25 % pre-consumer recycled content. Percentage recycled content varies by model. Figure stated is the lowest percentage of recycled content for the three protection levels. Environmental Product Declarations (EPD's) for 9322+ and 9332+ can be found on the International EPD® system website.

**Packaging:** At least 30% recycled content in individual product wrap 100% recycled content in primary carton, 76% recycled content in shipper case

## Storage and Transportation

3M™ Aura™ Particulate Respirators 9300+ Series have a shelf life of 5 years from date of manufacture. End of shelf life is marked on the product packaging and upon the product. Before initial use, always check that the product is within the stated shelf life (use by date).

Product should be stored in clean, dry conditions within the temperature range: – 20°C to + 25°C with a maximum relative humidity of <80%. When storing or transporting the respirator, remove bend in noseclip, align top and bottom panels together before pushing the top panel flat. Store respirator in original packaging provided.

## Warnings and Limitations

Always be sure that the complete product is:


- Suitable for the application;
- Fitted correctly;
- Worn during all periods of exposure;
- Replaced when necessary.
- Proper selection, training, use and appropriate maintenance are essential in order for the product to help protect the wearer from certain airborne contaminants.
- Failure to follow all instructions on the use of these respiratory protection products and/or failure to properly wear the complete product during all periods of exposure may adversely affect the wearer's health, lead to severe or life threatening illness or permanent disability.
- For suitability and proper use follow local regulations and refer to all information supplied. For more information contact a safety professional/3M representative.
- Before use, the wearer must be trained in use of the complete product in accordance with applicable Health and Safety standards/guidance.
- These products do not contain components made from natural rubber latex.
- These products do not protect against gases/vapours such as glutaraldehyde.
- Do not use in atmospheres containing less than 19.5% oxygen. (3M definition. Individual countries may apply their own limits on oxygen deficiency. Seek advice if in doubt).
- Do not use for respiratory protection against atmospheric contaminants/concentrations which are unknown or immediately dangerous to life and health (IDLH).
- **Do not use with beards or other facial hair that may inhibit contact between the face and the product thus preventing a good seal.**

- Leave the contaminated area immediately if:
  1. Breathing becomes difficult.
  2. Dizziness or other distress occurs.
  3. The respirator becomes damaged
  4. You taste or smell contaminants, or an irritation occurs
- Discard and replace the respirator if it becomes contaminated with blood or other infectious material, damaged, breathing resistance becomes excessive or at the end of a shift.
- Do not alter, modify, clean or repair this respirator.
- In case of intended use in explosive atmospheres, contact 3M.
- Before initial use, always check that the product is within the stated shelf life.

## Fitting Instructions

Before fitting device, ensure hands are clean. All respirator components should be inspected for damage prior to each use.

1. With reverse side up, separate top and bottom panels to form a cup shape. Bend slightly at centre of the noseclip.
2. Ensure both panels are fully unfolded.
3. Cup respirator in one hand with open side towards face. Take both straps in other hand. Hold respirator under chin, with nosepiece up, and pull straps over head.
4. Locate the upper strap across the crown of the head and the lower strap below the ears. Straps must not be twisted. Adjust top and bottom panels for a comfortable fit, ensuring panels are not folded in.
5. Using both hands, mould nose clip to the shape of the lower part of the nose to ensure a close fit and good seal. Pinching the nose clip using only one hand may result in less effective respirator performance.
6. The seal of the respirator on the face should be fit- checked before entering the workplace.

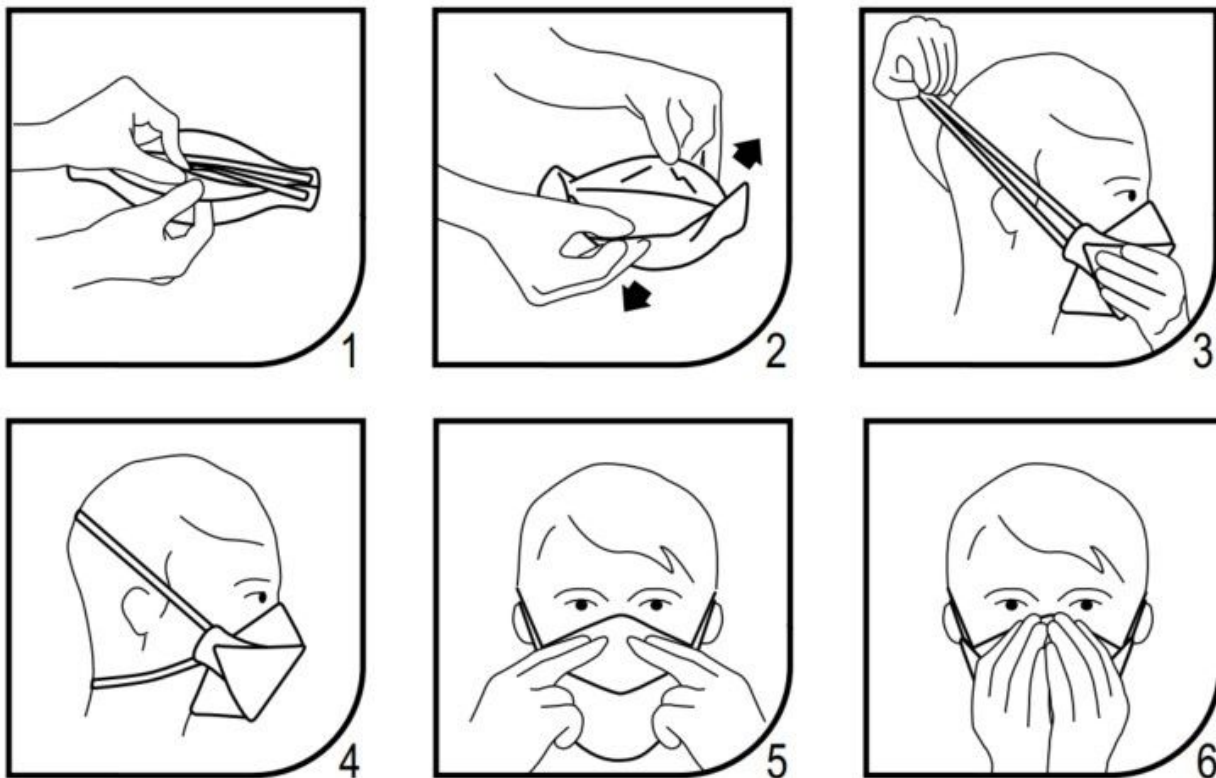

## Seal Check

1. Cover the front of the respirator with both hands being careful not to disturb the fit of the respirator.
2. (a) UNVALVED respirator - EXHALE sharply;(b) VALVED respirator - INHALE sharply;If you CANNOT achieve a proper seal DO NOT enter the hazardous area. See your supervisor.3M recommends that users are face fit tested before using a respirator and that fit testing is repeated regularly as part of their occupational protection program.For information regarding fit testing procedures, please contact 3M.
3. If air leaks around the nose, re-adjust the nose clip to eliminate leakage. Repeat the above seal check.

- If air leaks at the respirator edges, work the straps back along the sides of the head to eliminate leakage. Repeat the above seal check.

If you CANNOT achieve a proper seal DO NOT enter the hazardous area. See your supervisor.






3M recommends that users are face fit tested before using a respirator and that fit testing is repeated regularly as part of their occupational protection program.

For information regarding fit testing procedures, please contact 3M.

## Disposal

Contaminated products should be disposed as hazardous waste in accordance with national regulations.

## Marking

NR = Non reusable (single shift use only) D = Meets the clogging requirement	
	End of Shelf Life. Date format: YYYY/MM/DD
	Temperature Range
	Maximum Relative Humidity
	Name and address of Legal Manufacturer
	Dispose of in accordance with local regulations

## Approvals

The 3M Aura Particulate Respirators 9300+ meet the performance requirements of the European Standard EN 149 for Filtering half masks to protect against particles. The Certificate and Declaration of Conformity are available from the following website: [www.3M.com\Respiratory\certs](http://www.3M.com\Respiratory\certs)

Made in UK, in an ISO 9001 and ISO 14001 certified plant. 3M™ Aura™ 9300D+ Series - Made in Germany in an ISO 9001 and ISO 14001 certified plant.

## IMPORTANT NOTICE

The use of the 3M product described within this document assumes that the user has previous experience of this type of product and that it will be used by a competent professional. Before any use of this product it is recommended to complete some trials to validate the performance of the product within its expected application.

All information and specification details contained within this document are inherent to this specific 3M product and would not be applied to other products or environment. Any action or usage of this product made in violation of this document is at the risk of the user.